

G-LED

G-BP-RYG-50 24DC

Introduction:

1. Innovative design, three colors on a single layer.
2. Buzzer optional, volume louder than 85dB.
3. Double PC lens, soft light, better visual effect.
4. Three kinds of base are available, easy to install.
5. Pole length can be customized.


Application: CNC machine, Automatic equipment , SMT equipment etc.

Warranty: 2 years

Certification: CE, RoHS, FCC

Parameter:

| | |
|---------------------|-----------------------------------|
| Full Power | 4W |
| Input voltage | DC12V, DC24V, AC100-240V(50/60Hz) |
| Input current | 60-200mA |
| Working Temperature | -20~45℃ |
| IP rating | IP53 |
| Buzzer volume | >85dB |
| Material | PC lens and ABS body |
| Lifetime | 50,000 hours |
| Installation | Fixed by screw or bracket |

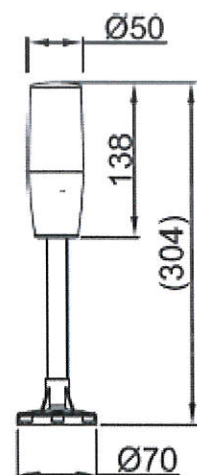

Wiring instruction:

PNP & NPN

